



B1B RELAY IS OPTIONAL, ONLY IF YOU WANT REMOVE HV WHEN ALL NECESSARY VOLTAGES ARE NOT OK. (SAFETY CHAIN OPEN). IF NOT USED, JUST PICK-UP HV FOR DETECTION FROM HV CONN.

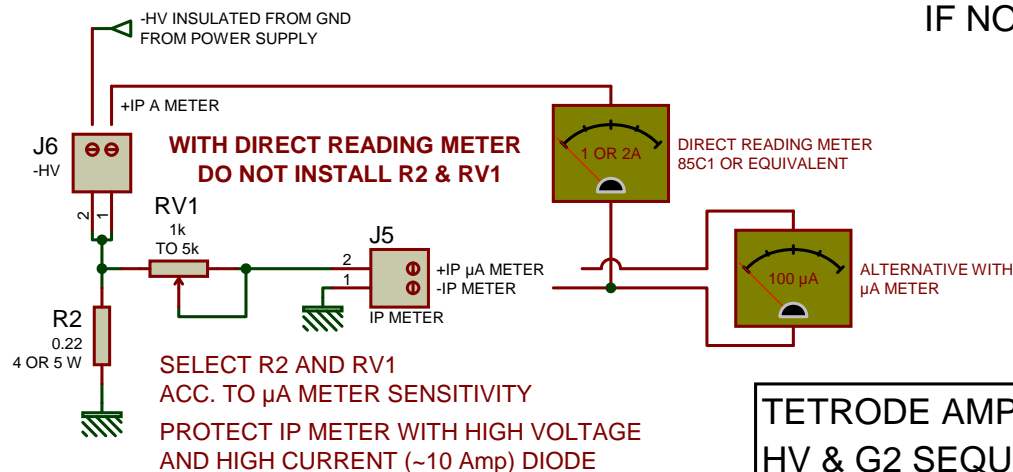

WHEN SAFETY CHAIN IS CLOSED,
 HV RELAY CLOSSES WITHOUT DELAY.
 G2 RELAY CLOSSES ~ 1 SECOND AFTER HV RELAY.

IF SAFETY CHAIN OPENS,
 BOTH RELAYS OPENS WITHOUT DELAY.

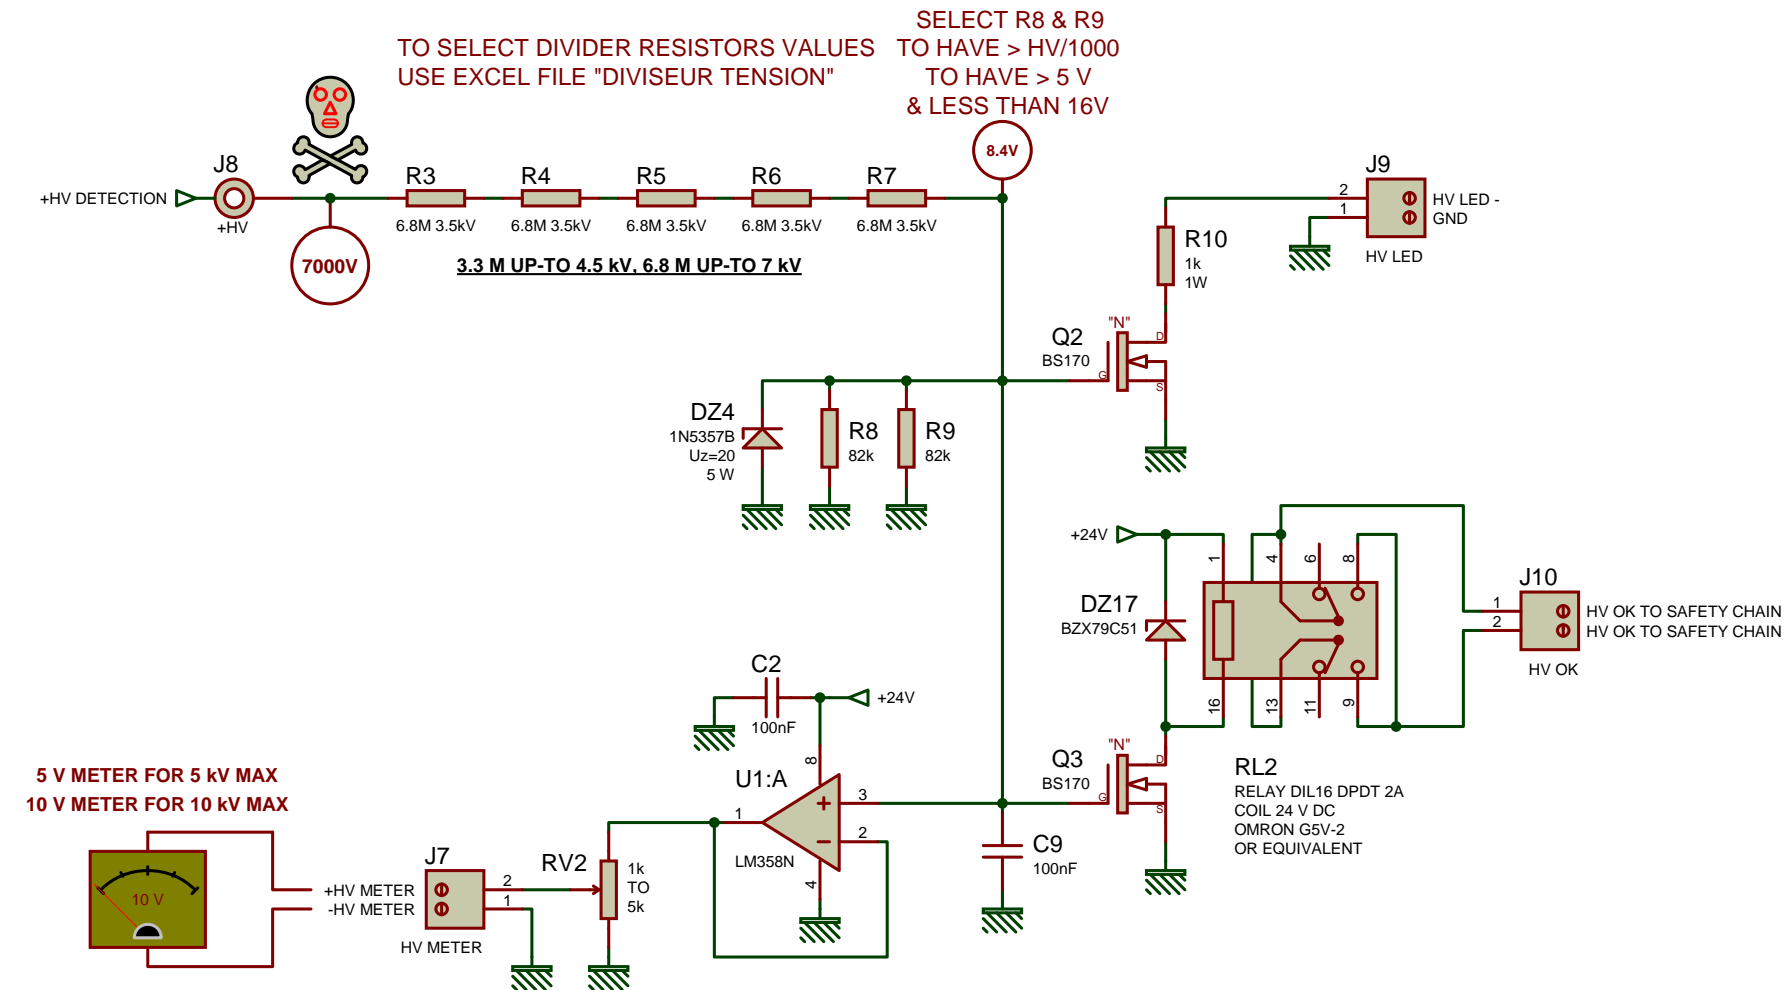

TETRODE AMPLIFIER DESIGN SUITE HV DETECTION & METER