

REV 6a: ONLY SUPPRESSED 1 USELESS STRAP

FOR V G2 LESS THAN 500 V, USE CIRCUIT REV 5a


CIRCUIT SIMPLE FACE      DIMENSIONS 135 x 160 mm      178 TROUS

PCB SINGLE SIDE      DIMENSIONS 5.3" x 6.3"      178 HOLES

FIXATION: 4 VIS M3, ENTRAXES 125 x 150 mm

FIXATION: 4 x M3 SCREWS, AXIS 125 x 150 mm

Q1 INSULATED FROM GROUND  
USE LARGE HEATSINK (AIR COOLED)  
R<sub>th</sub> BETTER THAN 1.5 DegC/W

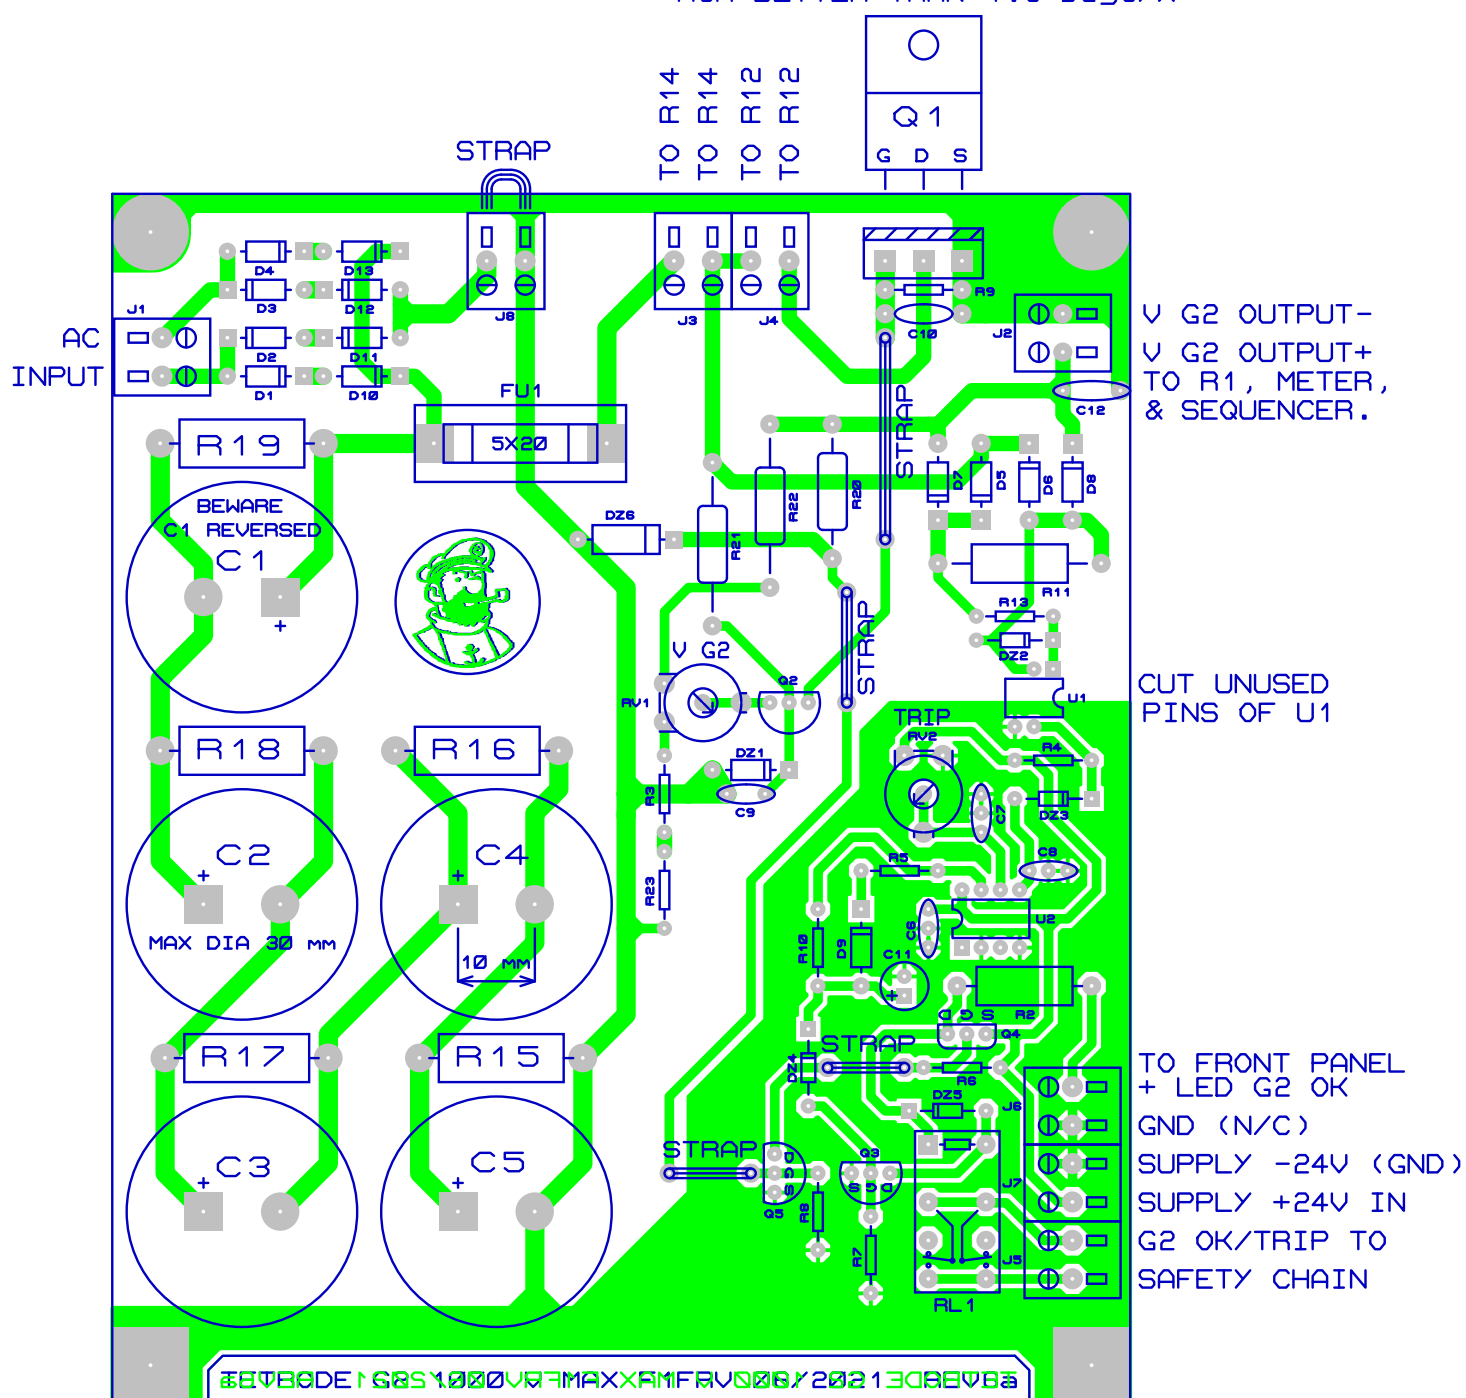

DONT FORGET THE 5 STRAPS