


PTT SEQUENCER FOR RX PREAMPLIFIER, LINEAR AMPLIFIER OR TRANSVERTER

DATE: 10/2022 REV: 3
BY: F1FRV@SFR.FR
DOC N°: AMATEUR RADIO

REV3: ADDED THERMAL PADS FOR BETTER COMPONENTS SOLDERING
REV3: REPLACED 2N7000 BY BS170, ADDED OPTIONAL D7
PCB DIMENSIONS: 95 × 140 mm (3.74" × 3.9")
4 FIXATION HOLES DIA 3.2 mm AXIS 85 × 130 mm

CIRCUIT DOUBLE FACE / DUAL SIDE PCB WITH RELAYS 16 AMPS

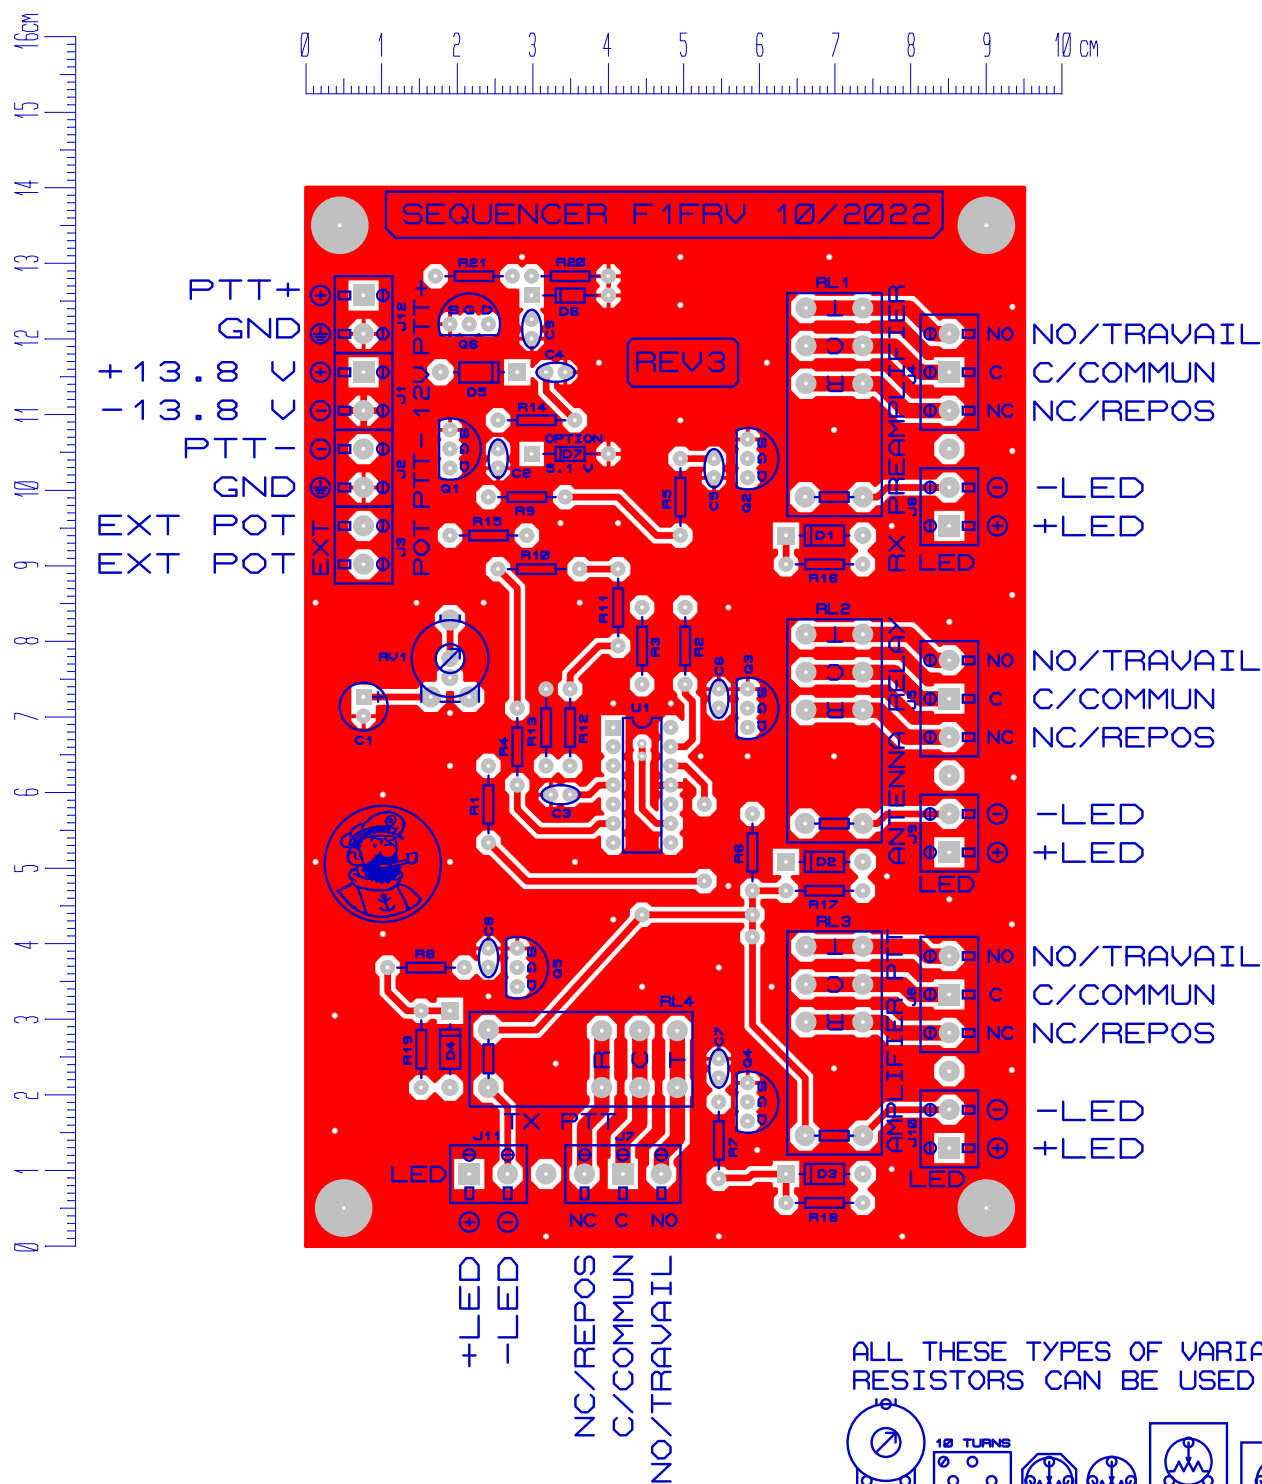

NOTA TERMINAL BLOCKS CAN BE 16 × 2 POLES,
INSTEAD OF 4 × 3 POLES & 8 × 2 POLES,
WITH EXTRA UNUSED AVAILABLE HOLES !