



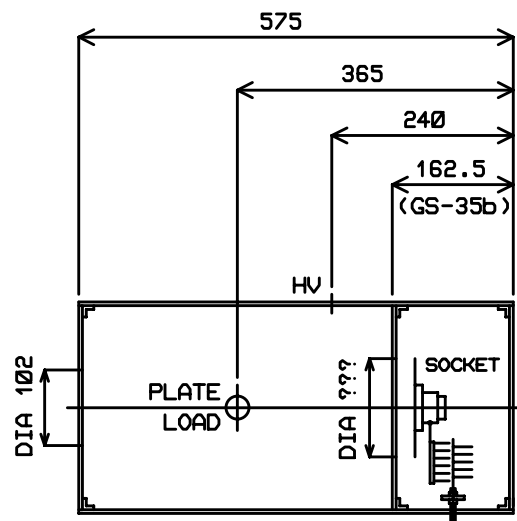
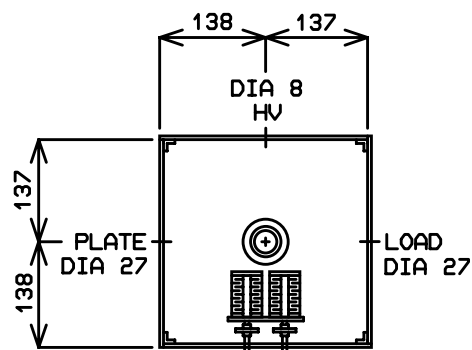

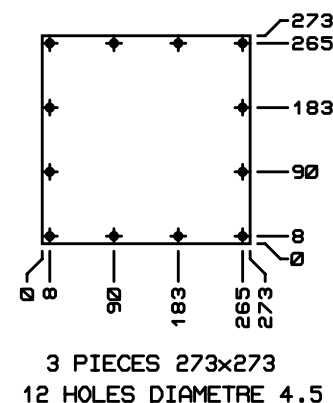


4 x 150x150  
REINFORCEMENT PLATES  
WITH HOLE 27

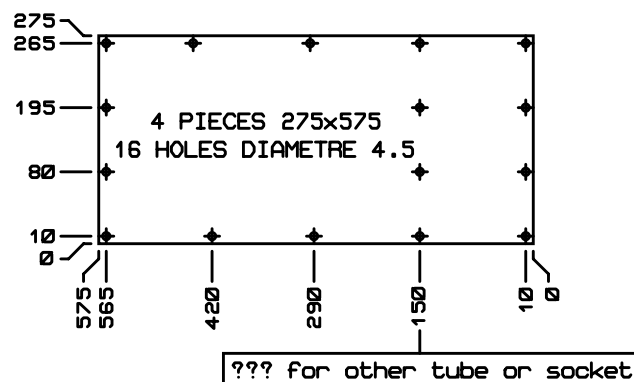

DIA ??? = 130 for F1BHY GS-35b socket  
DIA ??? = 102 for "integral" GS-35b socket  
DIA ??? = ??? for other tube or socket

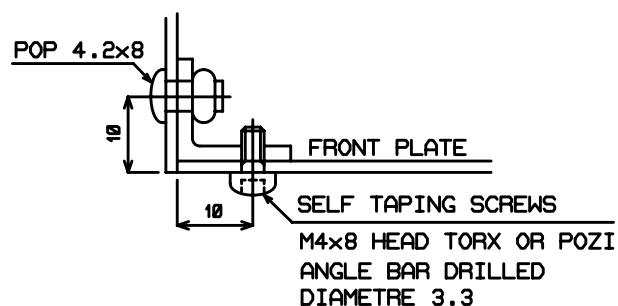

IF POSSIBLE, USE ALODINE 1200 CHROMATATION  
FOR BETTER CONDUCTIVITY OF ALUMINIUM ALLOY

ELECTROZINCED / GALVANIZED STEEL THK 1 mm OR ALUMINIUM ALLOY 5754 (AG3)

AVOID ANODIZED ALLOY !!

GS-35b 3 x HALF WAVE UHF CAVITY 275 x 275 mm  
MECHANICAL AND DRILLING GUIDE DRAWING

DATE: MAY 2012 REV: 2  
BY: F1FRV@SFR.FR  
DOC: AMATEUR RADIO PAGE: 1/1