


Number of contacts	3	4	5
Contact Arrangement (Front view of pin inserts)			
Max. Wire Gauge - Stranded wire: Solder Printed Circuit Board - PCB	14AWG N/A	16AWG N/A	18AWG N/A
Test Voltage AC RMS	1400V		
Current carrying capacity: Solder	15A	10A	7.5A

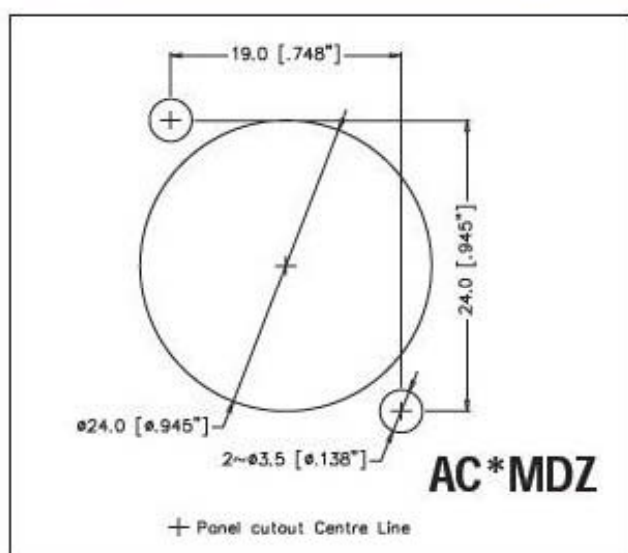

Embases chassis XLR RADIOSPARES

Percage dia 24, 2 trous en diagonale 19x24

Males

3P □ 458036

4P □ 6660608

5P □ 458030

Femelles

3P □ 458042

4P □ 6660601

5P □ 458046

