


5400 V MAX CAPACITORS & BLEEDERS BANK REV2 F1FRV JULY 2022

12 CAPACITORS 820 TO 1200 μ F MAX DIA 40 mm 400 TO 450 V & 24 BLEEDERS RESISTOR.

PCB 150 x 255 mm (5.9 x 10.025 in) 85 HOLES

FIXATION HOLES 120, 150, 190 & 245 x 140 mm

USE INSULATING POSTS TO HAVE PCB AT LEAST AT 30 mm OF GROUND.

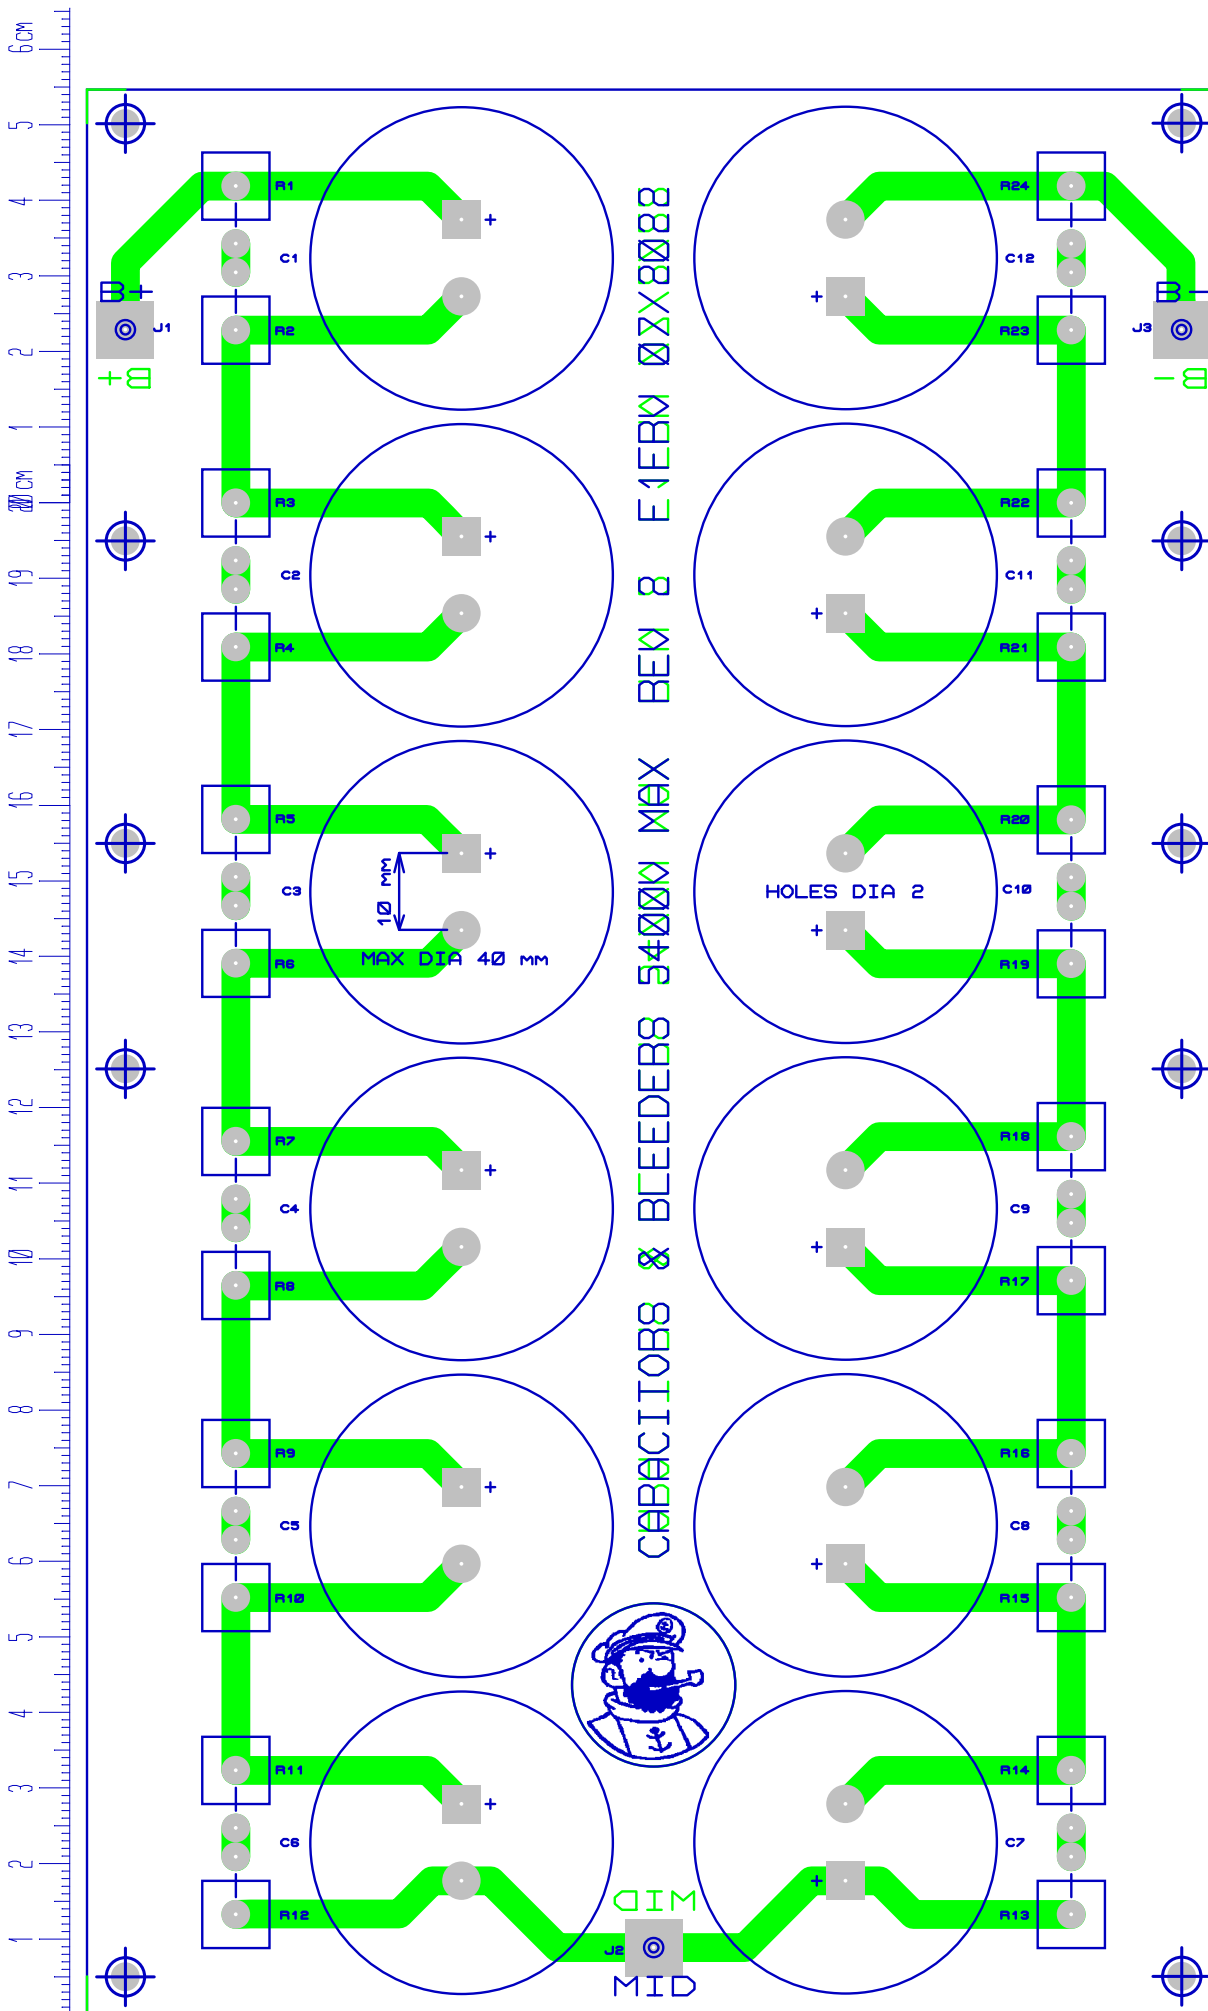

RECTIFIERS BRIDGE CAN BE STACKED >25 mm OVER CAPACITORS TOP

A SMALL FAN IS ADVISED TO COOL DOWN BLEEDER RESISTORS (DISSIPATION ~ 40 W)