


HIGH VOLTAGE BRIDGE 10 kV F1FRV REV4A APRIL 2021 REV 4A TO REPLACE WPRT RESISTORS (NOW HARD TO FIND)

20 DIODES 1 kV @ 6 OR 10 AMPS 10A07-T, P1000M, P600M, OR EQUIVALENT

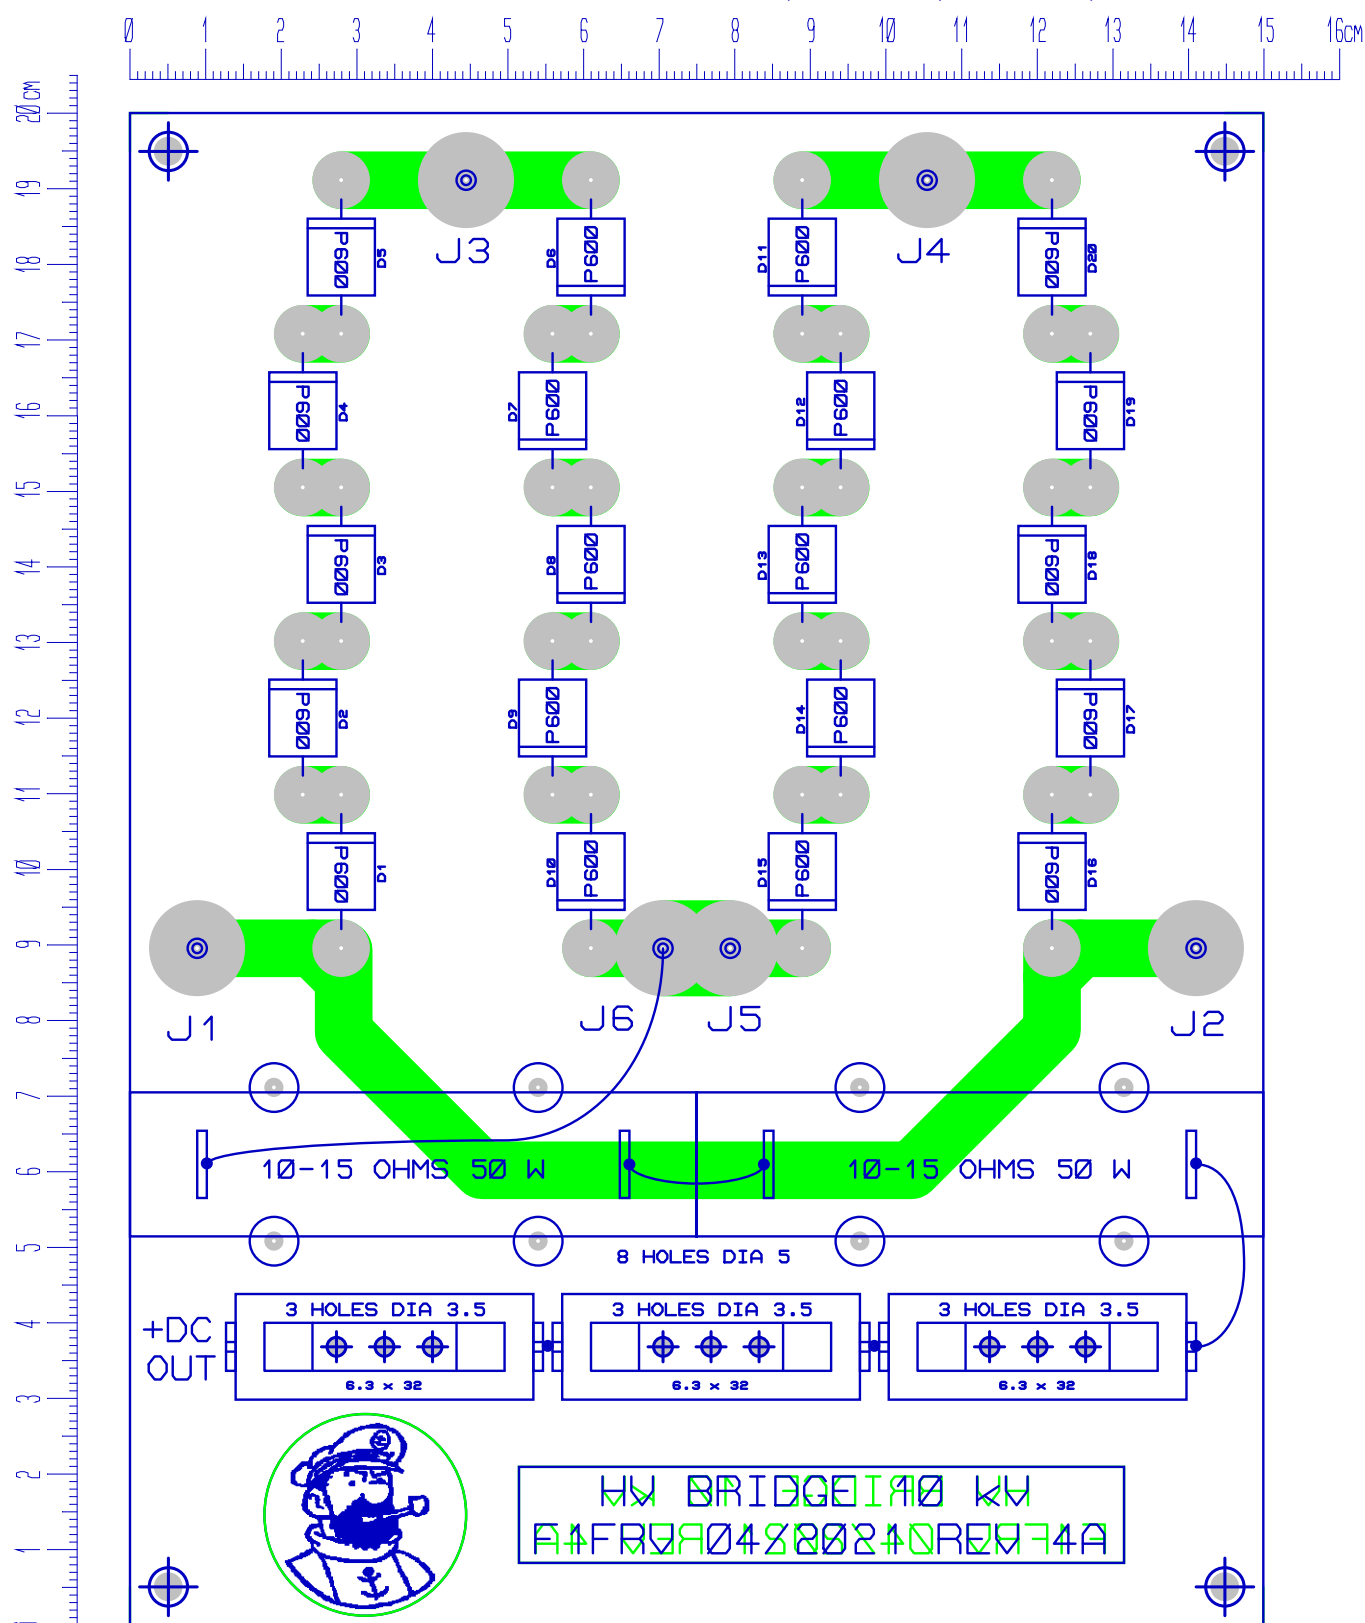

PCB 150 x 200 mm (HALF 200 x 300) 67 HOLES
FIXATION HOLES 140 x 190 mm
USE INSULATING POSTS 25mm MINIMUM LENGTH
USE 3 x M3 NYLON BOLTS FOR FUSES HOLDERS
8 HOLES DIA 5 FOR SELF LOCK PLASTIC STRAPS
USE 10 kV WIRES FOR EXTERNAL WIRINGS