


PTT SEQUENCER FOR RX PREAMPLIFIER, LINEAR AMPLIFIER OR TRANSVERTER

DATE: 05/2021 REV: 3
BY: F1FRV@SFR.FR
DOC N°: AMATEUR RADIO

TO USE BS170 INSTEAD OF 2N7000, INVERT S & D WHEN SOLDERING ON PCB
PCB DIMENSIONS: 99 x 145 mm 182 HOLES DONT FORGET THE STRAP !!!
4 FIXATION HOLES DIA 3.2 mm AXIS 135 x 90 mm

CIRCUIT SIMPLE FACE / SINGLE SIDE PCB WITH RELAYS 16 AMPS

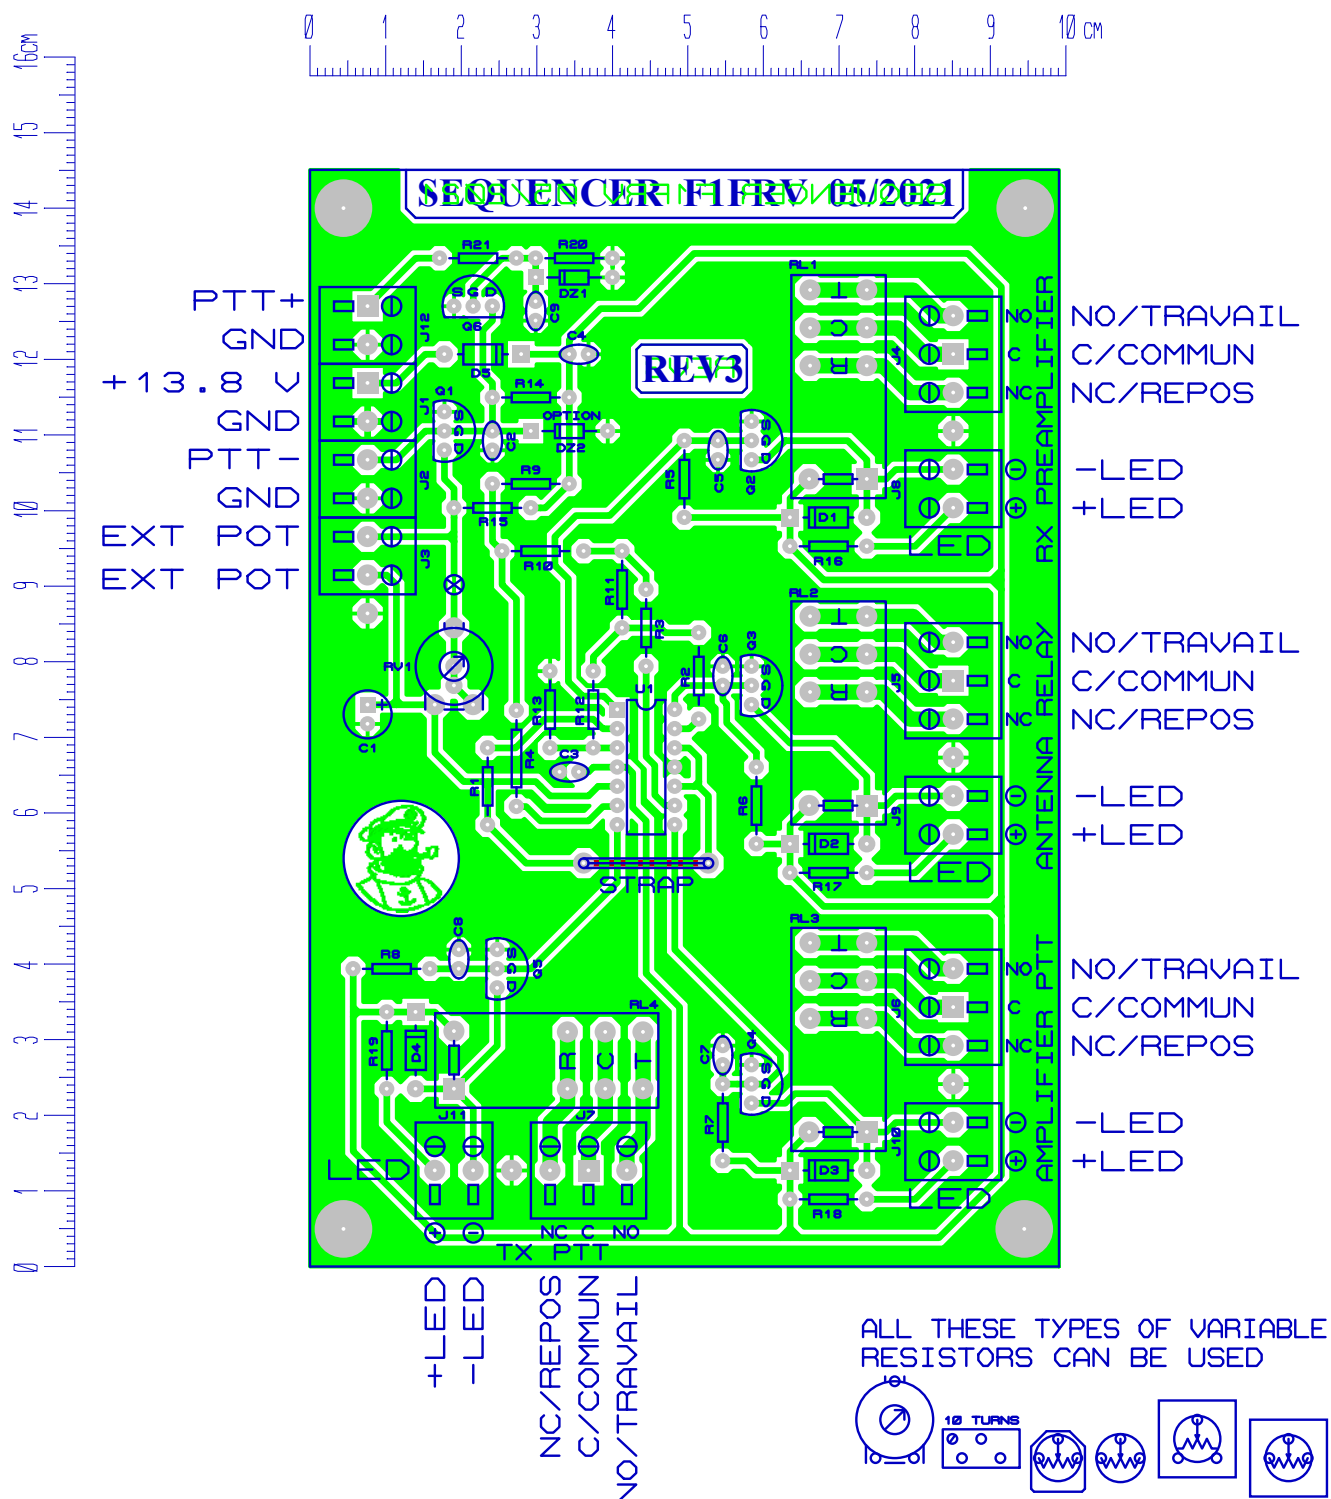

NOTA TERMINAL BLOCKS CAN BE 18 x 2 POLES, OR 11 x 3 POLES
INSTEAD OF 4 x 3 POLES & 8 x 2 POLES,
WITH EXTRA UNUSED AVAILABLE HOLES !